Features:
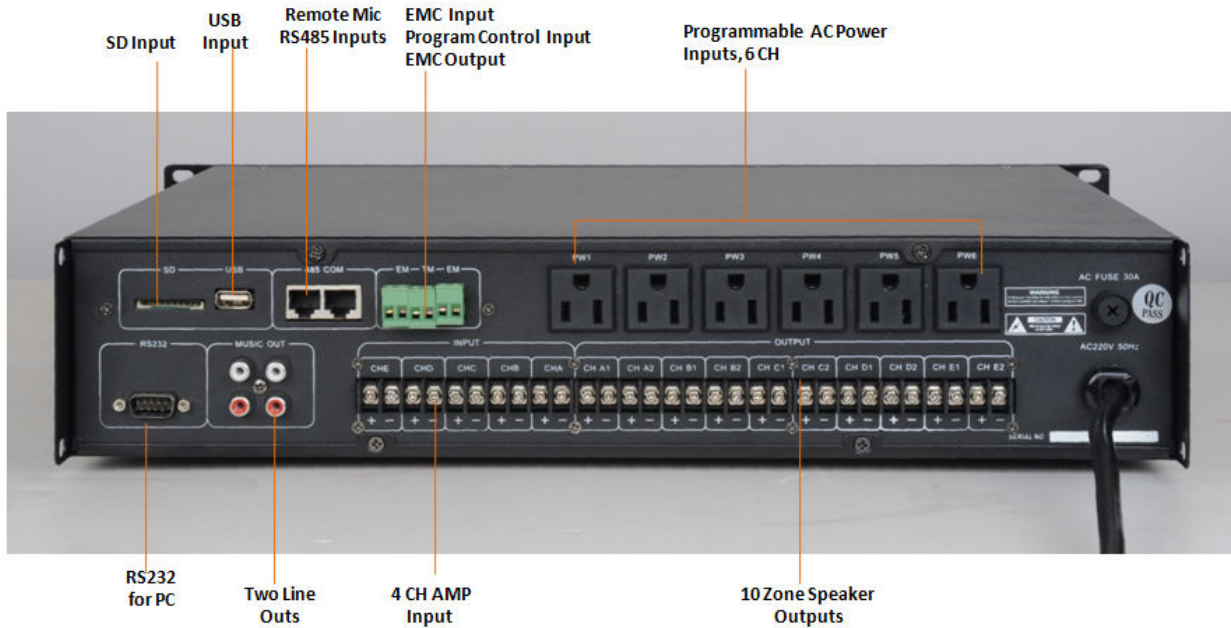
- ✓ Public address system classic cost-effective medium to big-scale sound system intelligent controller.
- ✓ Ideal PA sound system controller for school, shopping mall, hotel, and intelligent office etc.
- ✓ All in one intelligent PA system controller built in weekly timer, 10 zone speaker selector, Mp3 player, remote 10 zone paging controller, fire alarm and voice evacuation system interface and programmable power sequencer.
- ✓ Built-in weekly timer, monitor, 10 zone speaker selector, 6 channel power sequencer and Mp3 player.
- ✓ Expandable from 10 zones to 160 zones.
- ✓ 3 modes of voice alarm: all zones, separate zone and neighboring zones voice alarm.

- ✓ One amplifier or 5 amp inputs divided into 10 zones speaker output.
- ✓ Timely broadcast up to 99 program sources.
- ✓ Broadcast modes: random, repeat and circle.
- ✓ 4 regular programs and 1 spare program for emergency/particular circumstance.
- ✓ Functional swift key for internal MP3 player priority manual broadcast.
- ✓ Zone1-10 selector, all zone selectors, music/paging switch, MP3 swift button, swift program button, power control channel 1-4 buttons & menu button.
- ✓ Power handling 5000W over each 10 zones
- ✓ The system communication distance up to 1kms
- ✓ Memory function even in case of power off.

PA-200MC

SD Input · USB Input · Remote Mic RS485 Inputs · EMC Input Program Control Input EMC Output · Programmable AC Power Inputs, 6 CH

RS232 for PC · Two Line Outs · 4 CH AMP Input · 10 Zone Speaker Outputs

Specifications:
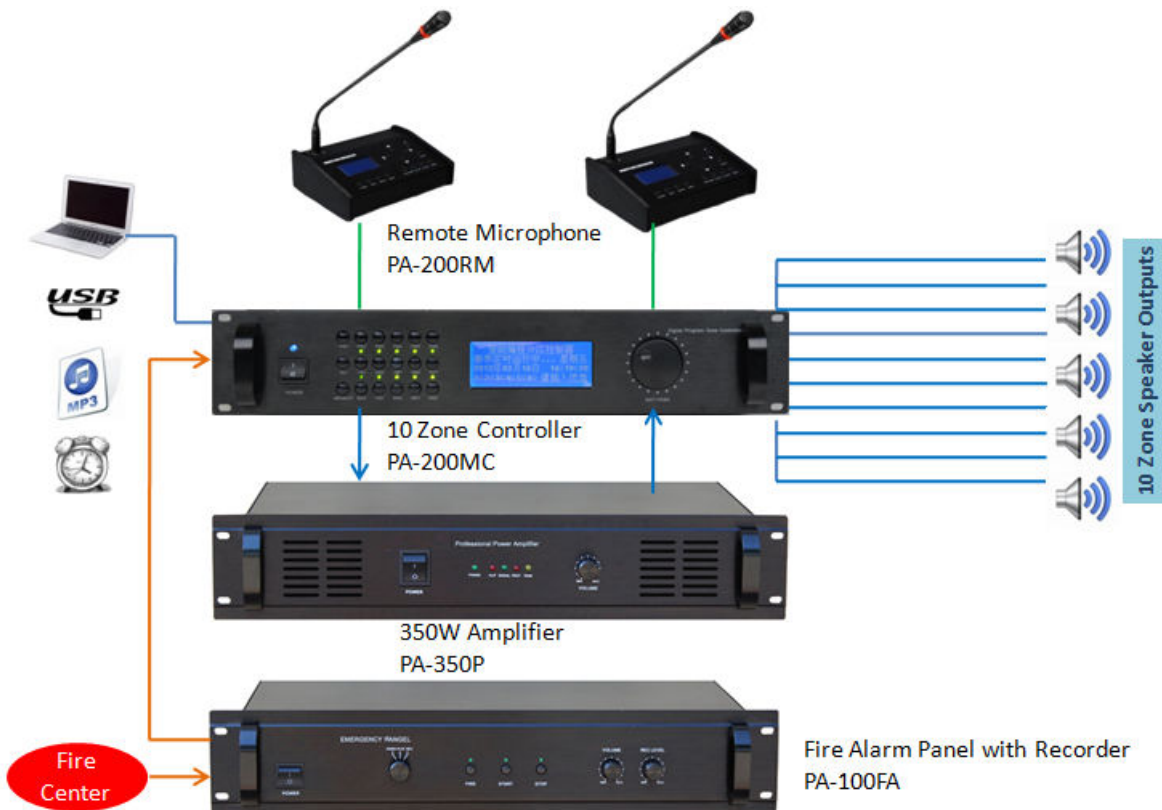
Model	PA-200MC
Description	**Intelligent 10 Zone Controller with Mp3**
Function Button	Light touch press buttons include: 4 power switch buttons, 1 MP3 control button, 1 backup program switch,10 zones speaker selector button, all zones button, 1 music or paging switch button. One menu button.
Indication Method	192x64 LCD display, English
Audio Output	1KΩ 0.775V Unbalance(6.35 RC), 0V(Short Circuit) Industrial Standard
EMC Input and Output	Integrated Terminal Block, 0V(Short Circuit) Industrial Standard
100V Input	Integrated Terminal 5 Channels: CHA CHB CHC CHD CHE
Amplifier Input and Output	0.5W
Monitor Power of Speaker	−∞~0dB
Monitor Volume Attenuator	24 hours(hour-minutes-seconds) weekly
Time Mode	Total 5pcs(4 normal programs, 1EMC)
Program Quantity	Total 512 Steps, 1 day 200 Steps
Program Steps	RS422
Communication Protocols	RS485 and RS232
Communication Port	Two RJ45 ports for remote microphone, one RS232 port for PC
Communication Speed	4800bps
MP3 Frequency Response	20Hz~20KHz/ 1dB
Mp3 Store Format	Compatible FAT12, FAT16, FAT32
Power Supply	~110V/60Hz or ~230V/50Hz
Dimensions	484x303x88mm
Weight	6.8kg

www.cmxaudio.com info@cmxaudio.com   CMX