

BUGERA V22

Boutique-Style 22-Watt Vintage 2-Channel Valve Combo with Reverb

Guitar Amplifiers

- Hand-built 22-Watt guitar combo driven by 2 x EL84 valves
- Way cool vintage look and feel
- Original heavy-duty 12" BUGERA guitar speaker for true vintage sound
- Authentic 2-channel preamp design from the '60s featuring 3 x 12AX7 valves—everything from purring blues to mind-blowing crunch
- Integrated high-class reverb with dedicated Reverb control
- Vintage Equalizer section with dedicated Bass, Mid, Treble and Presence controls
- Normal and Bright inputs for ultimate sound character to perfectly match your guitar
- Multi-gain stage Lead channel with Gain, Volume and Master controls
- Amazing Mode switch to select between Triode or Pentode operation
- Heavy-duty footswitch for Channel and Reverb function included
- Impedance connectors (4, 8 and 16 Ohms) to match virtually any external speaker cabinet
- High-quality components and exceptionally rugged construction ensure long life



A lot has changed since the 1960s, but the guitar tones created in those pre-moon landing days still stand among the greatest. The BUGERA V22 is a stunning 1 x 12" combo that not only exudes that unbelievable sound, but also possesses modern flourishes capable of taking it to any corner of the musical landscape.

Perfect for practice, home recording or small club gigs, this loud lad channels its mojo from two EL84 power valves. These give it the bratty, breakup-prone power amp compression (especially in triode mode – more on that later!) its 6L6GC-equipped siblings can only achieve at high volumes.

Old Soul, New Tricks

The V22 gives you everything that antique amps deliver—without the bloated price tags. Don't be fooled, though; this amp packs a special feature that makes it so much more than a tribute to the early days of guitar amplification. To explain, we must take a quick step back in time...

Before greasy juvenile delinquents hijacked the blues, guitar amps generally came in two species: those with triode (having three active electrodes) power valves and those with pentode (containing five active electrodes) power valves. Triode valves, which came before pentodes, provide what a lot of guitarists describe as a "gentler" tone. Pentodes, on the other hand, are decidedly more "in-your-face."

Continued on next page



THE SOUL OF VALVES
Bugera

BUGERA V22

Boutique-Style 22-Watt Vintage 2-Channel Valve Combo with Reverb

Features

The V22 is built for power pentode tubes, but that doesn't mean you have to settle for a singular pentode personality. This amp includes a Mode switch, allowing you to operate the power section as if it had triode tubes (at roughly 40 percent less power). So what'll it be today— old-school or oldest-school?

Voracious Vintage

The sound of the V22 begins with a two-channel (Clean and Lead) preamp. Plug into either the Bright or Normal inputs, then adjust the three-band EQ (Bass, Mid, Treble) and Presence control to create a sound all your own. Its three 12AX7 preamp tubes provide a vast feast of fuzz. Take your tone anywhere from dignified blues to garage-leveling madness.


The dual EL84 valves in the power stage propel its terse cockney tone through a BUGERA 12" speaker. If you need to feed more speakers, the V22's Impedance switch makes it compatible with 4, 8 or 16 Ohms, making it compatible with just about any speaker cabinet you can find.

You also get reverb, but for utmost durability and sound, this classic effect is derived from a professional quality digital processor. The spring reverb found in antique amps sound great, but they're delicate and expensive to repair. This modern touch gives you a vintage-sounding reverb sound that's every bit as beautiful, but a million times less breakable.


And if all these features weren't enough...

You also get an incredibly durable footswitch allowing you to select channels and engage the reverb without stopping mid-show. Whether you're making a record, practicing, or paying your dues on the dive bar circuit, the V22 can complement your craft with the gold-standard tones of the past—today!

Front Panel

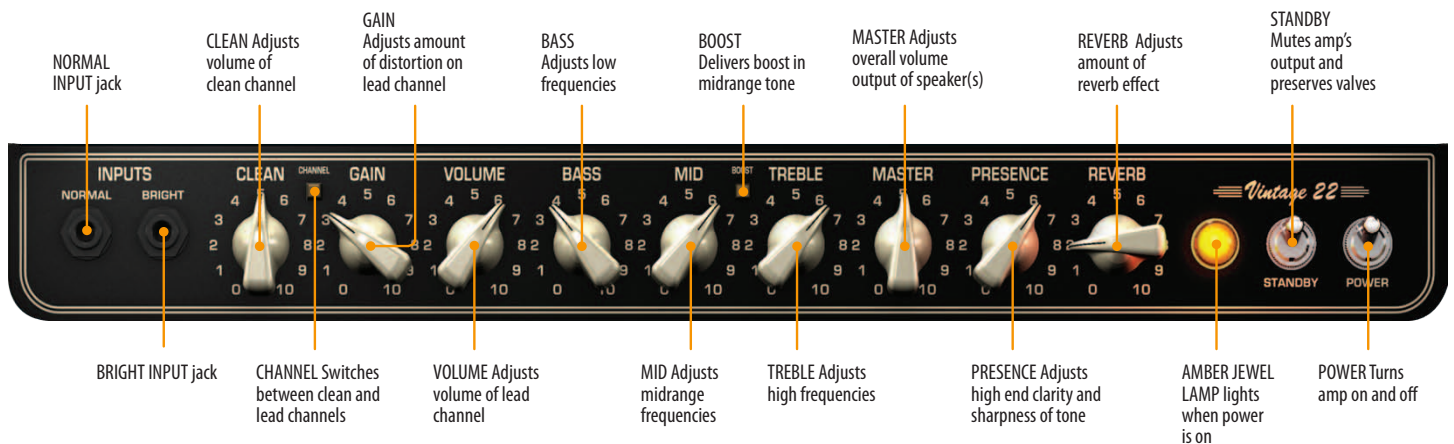

Rear Panel

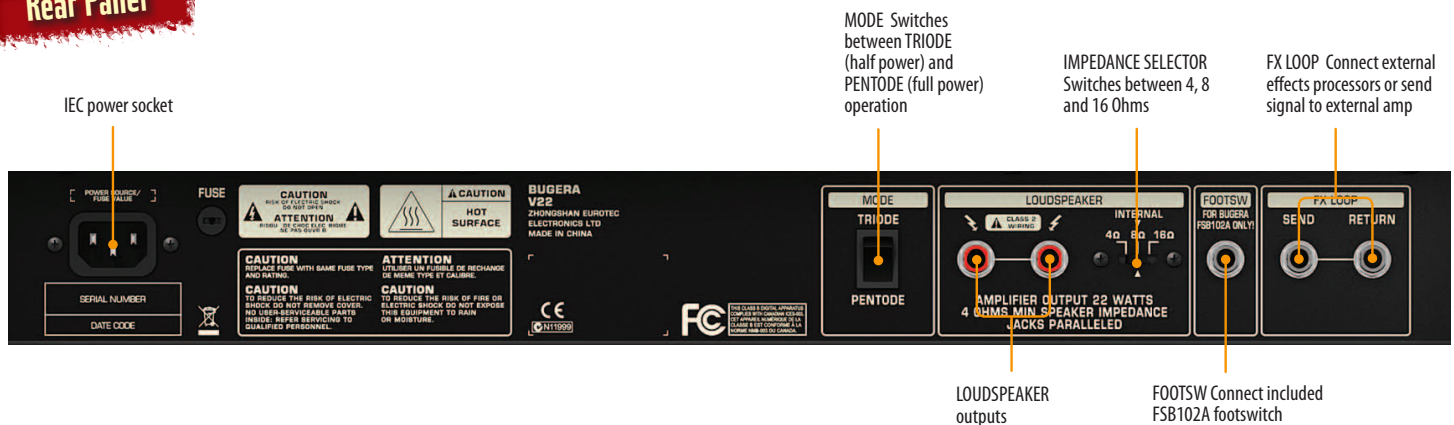


BUGERA V22

Boutique-Style 22-Watt Vintage 2-Channel
Valve Combo with Reverb

Hook-up

Standard Setup with Extension Cabinet

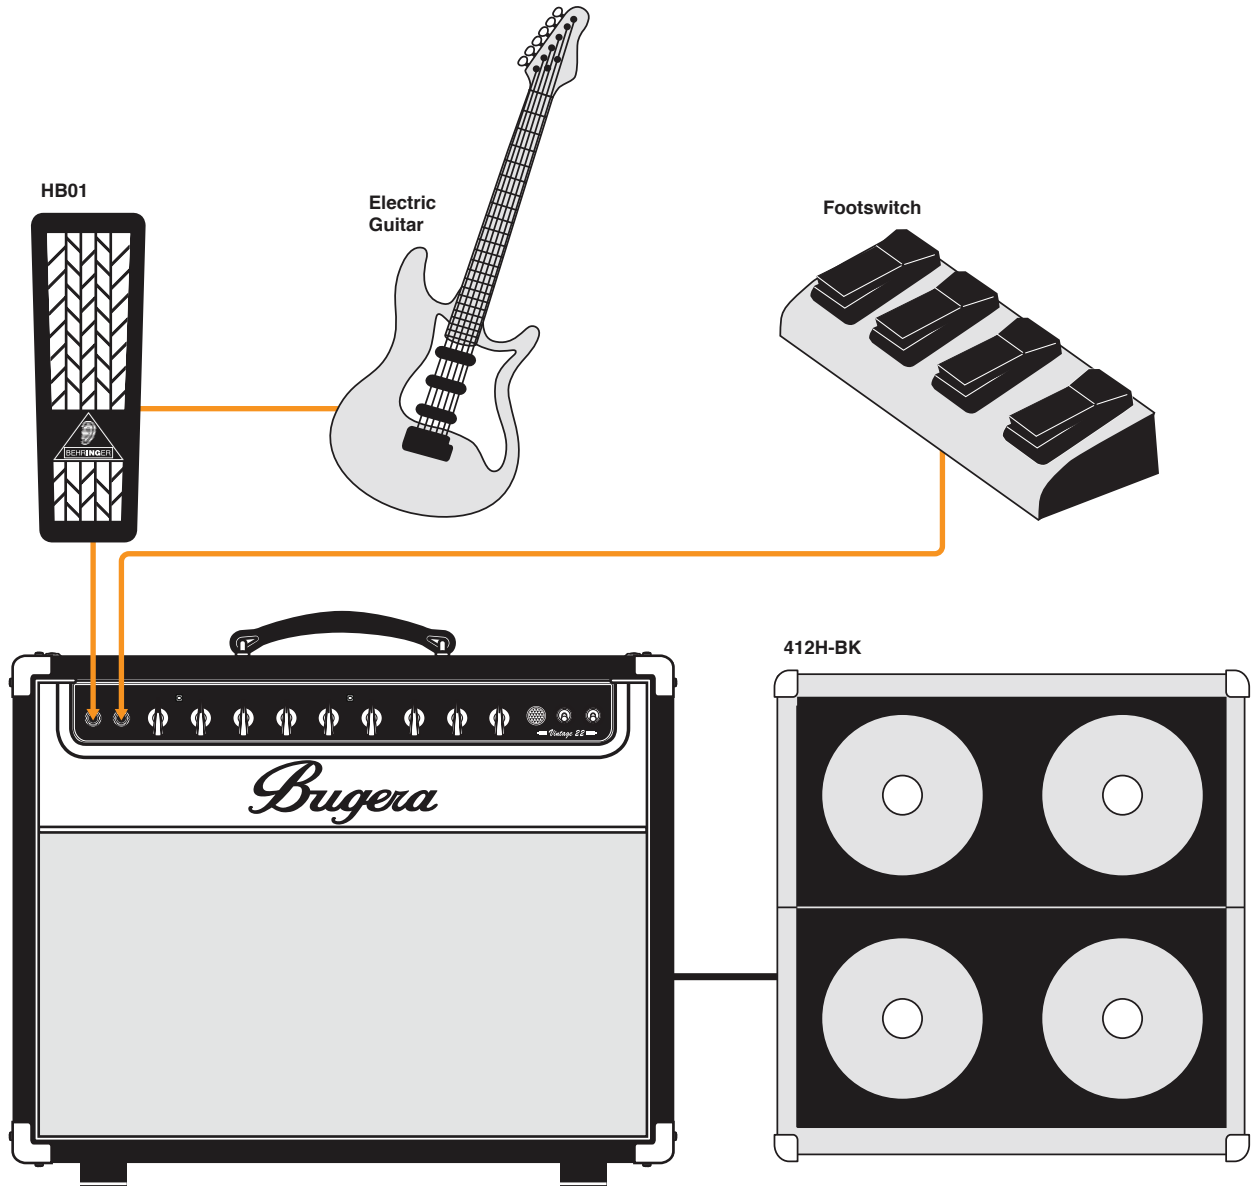

BUGERA V22

Boutique-Style 22-Watt Vintage 2-Channel
Valve Combo with Reverb

Specs

PREAMP SECTION

Valves

Type 12AX7

Normal Input

Impedance 470 kOhms

Bright Input

Impedance 147 kOhms

Effects Send

Impedance 1.2 kOhms

Effects Return

Impedance 53 kOhms

Maximum input sensitivity 7 dBV

POWER AMPLIFIER SECTION

Valves 2 x EL84

Output power 22 watts, 4 Ohms

Loudspeaker Connectors

Type ¼" unbalanced mono jacks

Load Impedance 4, 8, 16 Ohms switchable

Internal speaker

Type 12" Bugera, 12G70J8

Impedance 8 Ohms

Power 70 watts

POWER SUPPLY

Power consumption 72 W

Fuse 100-120 V T 1A H 250 V
220-230 V T630mA H 250 V

Mains connection Standard IEC receptacle

DIMENSIONS/WEIGHT

Dimensions (H x W x D) 17.8 x 22.5 x 10.6"
453 x 572 x 270 mm

Weight 42 lbs / 19 kg

We are constantly striving to maintain the highest professional standards. As a result of these efforts, modifications may be made from time to time to existing products without prior notice. Specifications and appearance may differ from those listed or illustrated.

Contact Info

BUGERA Support

For service, support or additional information, please refer to bugera.com or contact the MUSIC GROUP company nearest you.

Europe MUSIC Group Services EU GmbH
Tel.: +49 2154 9206 4149

USA/Canada MUSIC Group Services US Inc.
Tel.: +1 425 672 0816

Singapore MUSIC Group Services SG (Pte.) Ltd
Tel.: +65 6845 1800

Australia MUSIC Group Services AU Pty Ltd
Tel.: +61 03 9877 7170

Japan MUSIC Group Services JP K.K.
Tel.: +81 3 6231 0454

Technical specifications and appearances are subject to change without notice and accuracy is not guaranteed. BUGERA is part of the MUSIC Group (music-group.com). All trademarks are the property of their respective owners. MUSIC Group accepts no liability for any loss which may be suffered by any person who relies either wholly or in part upon any description, photograph or statement contained herein. Colors and specifications may vary from actual product. MUSIC Group products are sold through authorized fulfillers and resellers only. Fulfillers and resellers are not agents of MUSIC Group and have absolutely no authority to bind MUSIC Group by any express or implied undertaking or representation. This manual is copyrighted. No part of this manual may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording of any kind, for any purpose, without the express written permission of MUSIC Group IP Ltd. ALL RIGHTS RESERVED.
© 2012 MUSIC Group IP Ltd. Trident Chambers, Wickhams Cay, P.O. Box 146, Road Town, Tortola, British Virgin Islands. 985-10000-00403