

Features


- * 2 channel mixer of 10 inputs
- * Remote paging console T-319 as mic 1 with highest input priority
- * Mic 2-4 with VOX selector over inputs 5-10 and phantom power
- * All the 10 inputs with mic, line and high pass filtering selector
- * Inputs 6-10 either by XLR mic inputs or by dual RCA line inputs
- * Dual channel XLR line outputs
- * All inputs include inputs 1-10, PTT1 (remote paging console T-319), chime could be selected to have channel 1, channel 2 and channel 1+2 outputs.
- * Built-in 2/4 tone pre-set chime, remote chime trigger and local trigger on front panel
- * Volume controls are provided over chime, PTT1, inputs 2-10, channel 1 and channel 2 masters. Bass and treble tone control are provided for both channel 1 and channel 2.
- * Indicators for input 1-10, power and 2 channel level meters
- * AC 110 or 230V and DC 24V operation

Specifications

Model	T-2S01
Input Sensitivity/Impedance	
MIC/ Line	-50dBu(2.45mV)/5K Ω balanced; -10cBu(245mV)/5K Ω balanced
Line RCA In	-10dBu(245mV)/5K Ω unbalanced
Output Level/Impedance	
Master 1, 2	Nor +4dBu/200 Ω balanced
REC	Nor 0dBu/10K Ω unbalanced
Frequency Response	
Less Than	-0.5dB(20Hz~20KHz)
S/N Ratio	
MIC	More than 60dB
Line	More than 75dB
THD	
MIC	Less than 0.05%
Line	More than 0.03%
Cross-talk	
MIC	More than 60dB
Line	More than 75dB
Power Consumption Power	13W
Power Supply	~110V/60Hz or ~230V/50Hz & DC 24V
Dimensions(WxHxD)	484x44x265mm
Weight	3.9Kg



Rear Panel

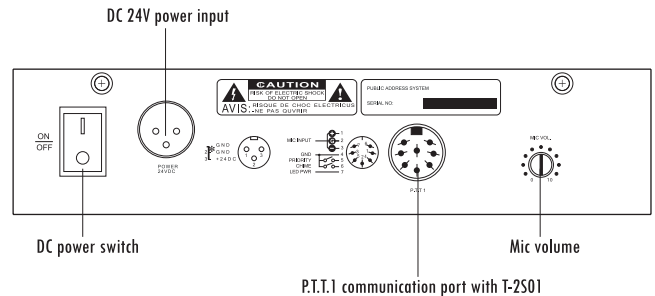

Specifications

Model	T-319
Output Level/impedance	0dB(unit gain)/600Ω balanced
MIC Input Sensitivity/Impedance	-50dB/600Ω balanced
Frequency Response	50Hz~18KHz, -3dB
THD	Less than 0.1%
S/N Ratio	Better than 65dB
MIC	
Type	Condenser Microphone
Polar Pattern	Unidirectional
Frequency Response	100Hz~16KHz
Impedance	Max 680Ω
Sensitivity(0dB=1V/0.1Paat 1KHz)	-47dB ± 3dB
S/N Ratio	More than 60dB
General	
Power Supply	DC 24V
Weight	960g (Without Microphone)
Dimensions(WxHxD)	199×128×44mm


Descriptions

T-319 is remote paging console with mixer T-2S01, whose communication distance up to 1kms. The paging console could be power supplied by the mixer within 50 meters, while extra DC 24V power supply is needed when distance is longer than 50 meters. This mic inputs with highest priority over all other inputs.

Features

- * Highest input priority
- * Condenser microphone type
- * 2 tone Pre-announcement chime
- * Talk and chime trigger functional buttons
- * 10 segment LED amplifier output level meters
- * Mic volume is provided
- * Extra DC power supply is needed when communication distance is more than 50 meters

Rear Panel

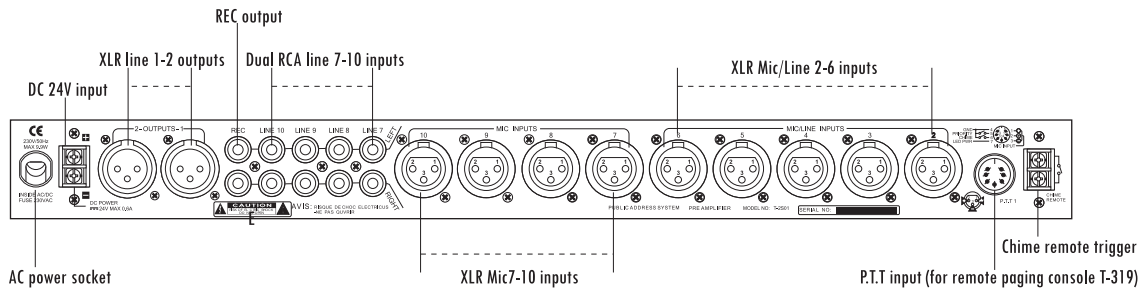

Connections

