

HF DRIVER TW600Ti

Professional Super Tweeter





Key Features

- 1.5" Voice Coil
- 100 Watts Continuous Power Handling
- 107 dB Sensitivity
- 4,000-22,000 Hz
- Titanium Diaphragm



GENERAL SPECIFICATIONS


Nominal Impedance	8	ohms
RMS Power ¹	100	Watts
Musical Program Power ¹	200	Watts
Sensitivity ²	107	dB
Minimum Crossover Point	5,000	Hz
Frequency Response	4,000-22,000	Hz
Diaphragm Material	Titanium	
Voice Coil Material	Copper	
Voice Coil Diameter	1.5/38	in/mm
Voice Coil Former Material	Kapton	
Inductance	0.066	mH
Flux Density	1.55	T
Magnet Material	Ferrite	

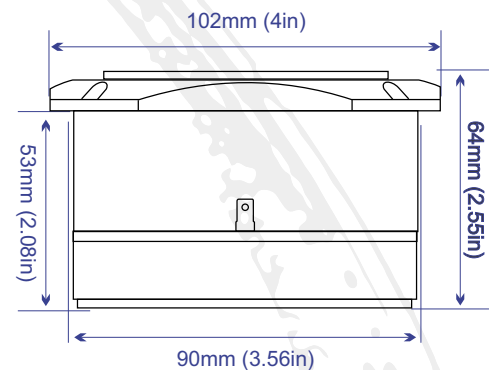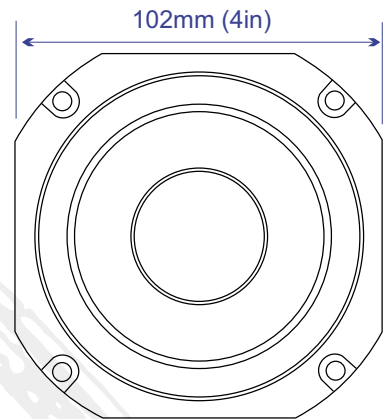

MOUNTING AND WEIGHT INFORMATION

Overall Diameter	4/102	in/mm
Overall Depth	2.55/64	in/mm
Mounting Depth	2.08/53	in/mm
Net Weight	3.67/1.67	Lbs/Kgs

Frequency Response Measured at 2.83v/1m

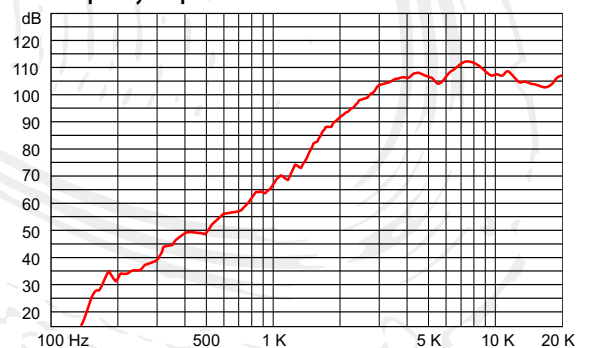

¹With Crossover at 5kHz, 12db octave

²2.83v@1m

NOTE: Driver must be connected to a crossover that meets recommended specifications.

NOTE: Products are subject to change without notice, please check PRVAudio.com for the latest datasheet.

PRV AUDIO USA (USA and Export)
MIAMI, FL
support@prvaudio.com
http://www.prvaudio.com

PRV AUDIO BRAZIL (Brazilian Sales Only)
SAO LEOPOLDO, RS
vendas@prvaudio.com.br
http://prvaudio.com.br