


PS15P.

Multicore PolySTAR - n x 2 x 0.15 mm²

- 0.15 mm² (AWG 26/19)
- tinned spiral pair shields
- pair jackets from TPE-E
- robust and firm PUR jacket
- very compact outer diameter

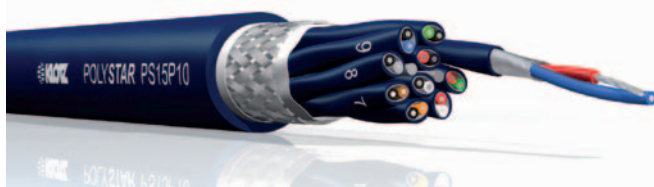

Outstanding electrical and mechanical features and the very compact overall diameter judges this cable as a first choice for OB vans, outdoor use or on stages. The numbered pair jackets and the outer jacket are from thermoplastic elastomeres (TPE). The spiral screen of the individual pairs, the braided overall screen and the extra cold-resistant PUR coating with high abrasion resistance creating real advantages when used in heavy environments e.g. open-air or any other mobile usage.

Konzipiert für OB-Vans, Outdoor- und Bühneneinsatz bietet dieses Audio-Multicore durch die Verwendung von Thermoplastischen Elastomeren (TPE) für die Paarmäntel und den Außenmantel äußerst kompakte Außendurchmesser bei gleichzeitig hervorragenden elektrischen und mechanischen Eigenschaften. Die Paare sind wendelgeschirmt und erlauben in Verbindung mit einem Gesamtgeflechtschirm und unserem besonders reißfesten und kälteflexiblen PUR-Außenmantel den mobilen Einsatz selbst unter erschwerten Open-Air-Bedingungen.

	Conductor	stranded tinned copper, 19 x 0.10 mm
	Cross Section	0.15 mm ²
	Insulation	Polyolefin, KLOTZ multicore colour-code
	Core Arrangement	2 cores twisted to a pair
	Pair Shielding	tinned copper spiral shield
	Pair Jacket	TPE, blue, numbered
	Overall Shield	tinned copper braid, 85% coverage
	Overall Jacket	PUR

	Min. Bending Radius	8 x overall diameter
	Working Temperature	-40 °C / +85 °C
	Halogen-Free	acc. to IEC 60754-1

	Conductor Resistance	< 125 Ω/km
	Capacitance	
	Cond./Cond.	90 pF/m
	Cond./Shield	155 pF/m
	Crosstalk Attenuation	> 100 dB (15 kHz)
	Insulation Resistance	> 30 GΩ x km
	Test Voltage	
	Cond./Cond.	1000 V
	Cond./Shield	500 V

	Leiteraufbau	verzinnte Cu-Litze, 19 x 0,10 mm
	Leiterquerschnitt	0,15 mm ²
	Isolation	Polyolefin, KLOTZ Multicore Farbkode
	Aderanordnung	2 Adern zum Paar verseilt
	Paarschirm	verzinnter Cu-Wendelschirm
	Paarmantel	TPE, blau, nummeriert
	Gesamtschirm	verzinnertes Cu-Geflecht, 85% Bedeckung
	Außenmantel	PUR

	Min. Biegeradius	8 x Außendurchmesser
	Betriebstemperatur	-40 °C / +85 °C
	Halogenfrei	nach IEC 60754-1

	Leiterwiderstand	< 125 Ω/km
	Kapazität	
	Ader/Ader	90 pF/m
	Ader/Schirm	155 pF/m
	Nebensprechdämpfung	> 100 dB (15 kHz)
	Isolationswiderstand	> 30 GΩ x km
	Prüfspannung	
	Ader/Ader	1000 V
	Ader/Schirm	500 V

sapphireblue

Order Code Bestell-Nr.	Number of Pairs Paarzahl	Outer Ø Außen Ø	Colour Farbe	Weight Gewicht	Standard Length [m] Standard Längen [m]	Max. Length / Reel Max. Länge / Spule
PS15P04	4	7.6 mm	sapphireblue (RAL 5003)	75 g/m	100	1000 m
PS15P08	8	10.3 mm	sapphireblue (RAL 5003)	145 g/m	100	800 m
PS15P12	12	11.8 mm	sapphireblue (RAL 5003)	190 g/m	100	500 m
PS15P16	16	13.2 mm	sapphireblue (RAL 5003)	238 g/m	100	500 m
PS15P24	24	16.0 mm	sapphireblue (RAL 5003)	345 g/m	100	800 m
PS15P32	32	18.3 mm	sapphireblue (RAL 5003)	430 g/m	100	500 m
PS15P40	40	20.1 mm	sapphireblue (RAL 5003)	530 g/m	100	300 m
PS15P48	48	22.0 mm	sapphireblue (RAL 5003)	625 g/m	100	500 m
PS15P56	56	23.5 mm	sapphireblue (RAL 5003)	735 g/m	100	300 m