


BASS GRAPHIC EQUALIZER BEQ700

Ultimate 7-Band Graphic Equalizer

Thank you for showing your confidence in us by purchasing the BEHRINGER BASS GRAPHIC EQUALIZER BEQ700. This ultimate effects pedal is specifically designed to match the frequency range of bass guitars. It allows 7-band sound shaping and feedback elimination from 50 Hz to 10 kHz. It has a powerful 15 dB boost/cut per band, ideally suited even for 5-string and 6-string bass guitars.

1. Controls

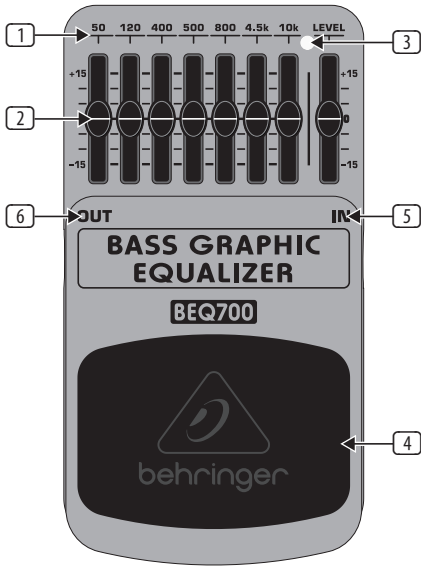

- 1 The **7-band EQ** faders allow boosting/cutting single frequency ranges from 50 Hz to 10 kHz at ± 15 dB.
- 2 The **LEVEL** fader adjusts the output level. It can be used to achieve effective volume “boost” or “cut.”
- 3 This **LED** illuminates when the EQ is activated. It also serves as a battery level indicator.
- 4 Use the footswitch to activate/deactivate the EQ.
- 5 Use this 1/4" TS **IN** connector to plug in the instrument cable.
- 6 The 1/4" TS **OUT** connector sends the signal to your amp.

Use the **DC IN** connection at the front of the unit to plug in a 9 V power supply (not included).

The **BATTERY COMPARTMENT** is located underneath the pedal cover. To install or replace the 9 V battery, press the hinges with a ballpen and remove the pedal cover. Be careful not to scratch the unit.

♦ The BEQ700 has no on/off switch. As soon as you insert the jack into the in connector, the BEQ700 begins running. When not using the BEQ700, remove the jack from the in connector. This extends the life of the battery.

The **SERIAL NUMBER** is located at the bottom.

2. Safety Instructions

Do not use near water, or install near heat sources. Use only authorized attachments/accessories. Do not service product yourself. Contact our qualified servicing personnel for servicing or repairs, especially when power supply cord or plug is damaged.

3. Warranty

Please register your new BEHRINGER equipment right after your purchase by visiting <http://behringer.com> and read the terms and conditions of our warranty carefully.

4. Specifications

In

Connector	¼" TS
Impedance	500 kΩ

Out

Connector	¼" TS
Impedance	1 kΩ

Power Supply

9 V $\overline{=}$, 100 mA regulated

BEHRINGER PSU-SB

PSU-SB-CN BEHRINGER	220 VAC adaptor China
PSU-SB-EU BEHRINGER	230 VAC adaptor Europe
PSU-SB-JP BEHRINGER	100 VAC adaptor Japan
PSU-SB-SAA BEHRINGER	240 VAC adaptor Australia
PSU-SB-UK BEHRINGER	240 VAC adaptor UK
PSU-SB-UL BEHRINGER	115 VAC adaptor USA

Power connector	2 mm DC jack, negative center
-----------------	----------------------------------

Battery	9 V type 6LR61
---------	----------------

Power consumption	30 mA
-------------------	-------

Physical/Weight

Dimensions (H x W x D)	approx. 2 1/8 x 2 3/4 x 4 1/8" approx. 54 x 70 x 123 mm
---------------------------	--

Weight	approx. 0.73 lbs / 0.33 kg
--------	----------------------------

BEHRINGER is constantly striving to maintain the highest professional standards. As a result of these efforts, modifications may be made from time to time to existing products without prior notice. Specifications and appearance may therefore differ from those listed or shown.

MUSIC Tribe accepts no liability for any loss which may be suffered by any person who relies either wholly or in part upon any description, photograph, or statement contained herein. Technical specifications, appearances and other information are subject to change without notice. All trademarks are the property of their respective owners. MIDAS, KLARK TEKNIK, LAB GRUPPEN, LAKE, TANNOY, TURBOSOUND, TC ELECTRONIC, TC HELICON, BEHRINGER, BUGERA and COOLAUDIO are trademarks or registered trademarks of MUSIC Tribe Global Brands Ltd. © MUSIC Tribe Global Brands Ltd. 2018 All rights reserved.

