

Concentrating on audio since 1988

MP9813D 10 Channels Indirect Speaker Selector



Features

- > 2CH inputs, 10CH outputs
- All call button
- Friendly panel, easy for use
- The channel will be switched to input B automatically while alarming

Specification


Channels	10, switchable
Input capacity	$70 \sim 100 \text{V} $, 10A
Channel capacity	$70 \sim 100 \text{V}$, $5 \text{A} / \text{CH}$
ALM	10 CHs , 0 / +24 V , 0 (short circuit) is Valid
Protection	AC fuse ×1
Power Requirement	AC 220 −240 V / 50~60 Hz
Dimensions	485×88×365 mm
Gross weight	6.5 kg
Net weight	5.2 kg

Specifications are subject to be changed without notice.




Concentrating on audio since 1988


FRONT PANEL

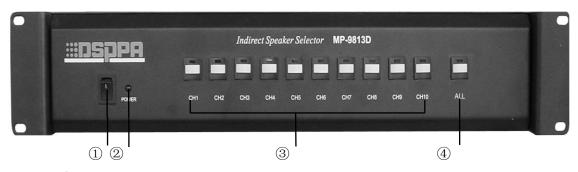

- ① Power switch. (1 is power on and the "power LED" is on)
- 2 Power indicator.
- ③ Distributor.
- 4 All call button.

REAR PANEL & CONNECTIONS

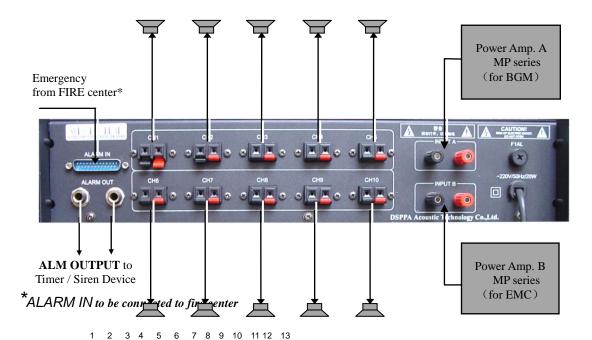



- 141-496 17 18 Ilávao Terminadseo (2CH1~CH10 respectively
- **14~25** COM