

## Crestron Flex Tabletop Medium Room Video Conference System

The UC-M50-U Crestron Flex tabletop conferencing system provides a medium room video conference solution for open-platform UC applications. It supports a single video display and features a Crestron Flex tabletop conference device and Huddly IQ™ Collaboration Camera.



### In the Box

#### Tabletop Conference Device

- 1 Tabletop Conference Device (6508083)
- 1 Cable, CAT5e, RJ-45 - RJ-45, 12 ft (3.7 m) (2033988)
- 1 Cable Retention Plate (2047908)
- 3 Tie Wrap (2047935)

#### Additional Items

- 1 Huddly IQ Collaboration Camera (6510482)
- 1 Camera Wall Mount Kit (6510998)
- 1 Cable, USB 3.0, USB-C® Right Angle - A, 6 ft (1.8 m) (6511591)
- 1 Cable, thin HDMI®, 6 ft (1.8 m) (6510946)
- 1 4-Port USB 3.0 Hub w/2A USB Power Adapter (6510546)
- 1 Cable, USB 2.0, A - Micro-B, 6 ft (1.8 m) (6510947)
- 1 Cable, HDMI, 20 ft (6.1 m) (6503567)
- 1 Cable, USB Extension, USB Type A Male-to-Female, 15 ft (4.6 m) (6508260)
- 1 IR Emitter Probe (6500940)
- 1 Power supply (6500187)



### Install the Cable Retention Plate


The included cable retention plate provides tie-down points for cables that connect to the Crestron® conference device.

Remove the adhesive backing from the cable retention plate and install it on the underside of the conference device as shown in the following diagram. Ensure the cable retention plate is firmly attached before securing cables.


**CAUTION:** When turning over the device, place the device on a soft surface to avoid damage.

**NOTE:** If a swivel mount kit ([CCS-UCA-SMK](#)) is to be used, use the cable retention bracket included with the swivel mount kit as described in the [CCS-UCA-SMK DO Guide](#) (Doc. 7882).

Install cable retention plate here

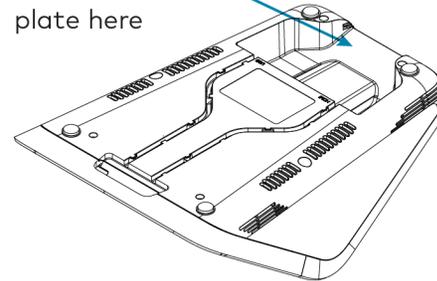

Cable retention plate installed

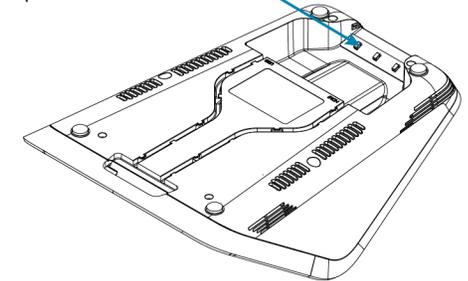


## Crestron Flex Tabletop Medium Room Video Conference System

### Connect

Make system connections as shown below.

- CAT5e**  
 12 ft CAT5e cable
- HDMI**  
 Display: 20 ft HDMI cable  
 Laptop: 6 ft HDMI cable
- Power**  
 Power Supply
- USB**  
 6 ft USB 2.0 A - Micro-B cable  
 15 ft USB 2.0 extension cable (optional)  
 Camera
- IR Emitter Probe**  
 7 ft integrated cable

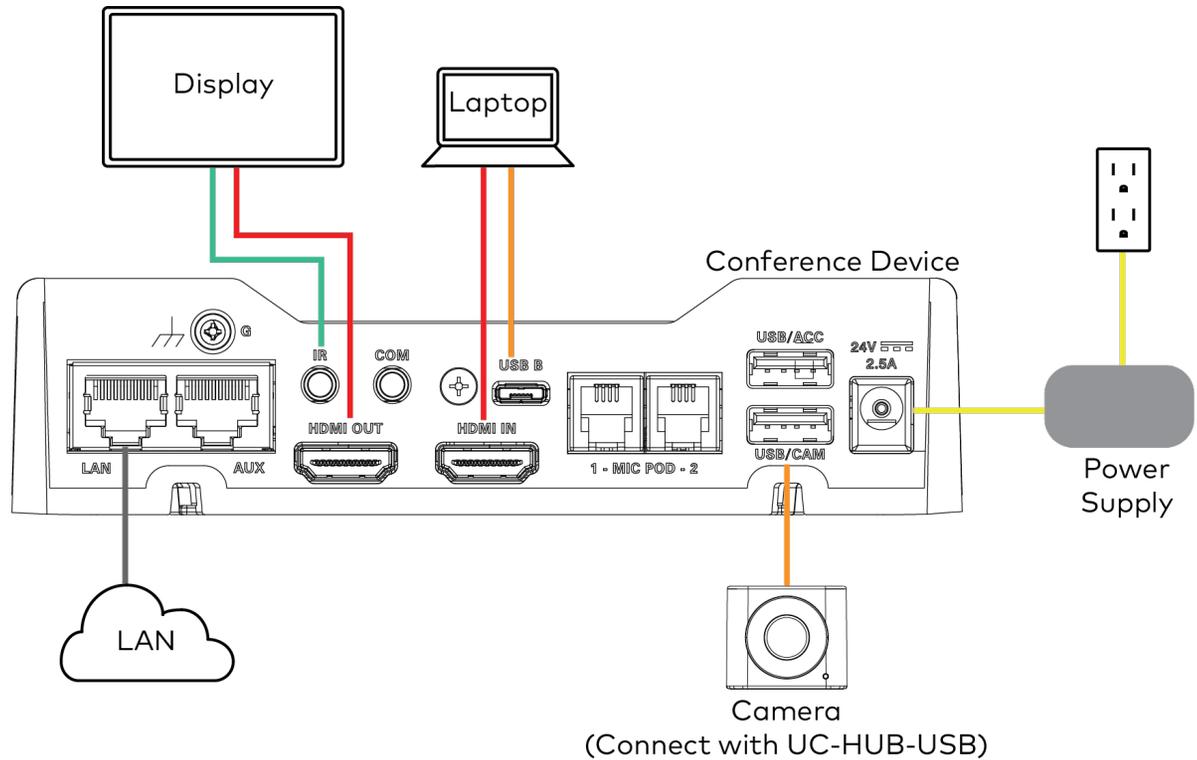


## Crestron Flex Tabletop Medium Room Video Conference System



## Bundle Cables

Bundle the cables together and use a provided tie wrap to secure the bundle to one of the positions on the cable retention plate at the rear of the device. Avoid bundling power and data cables together.

Insert the included USB and HDMI cables into their respective cable channels as labeled on the underside of the conference device and as shown in the following image.

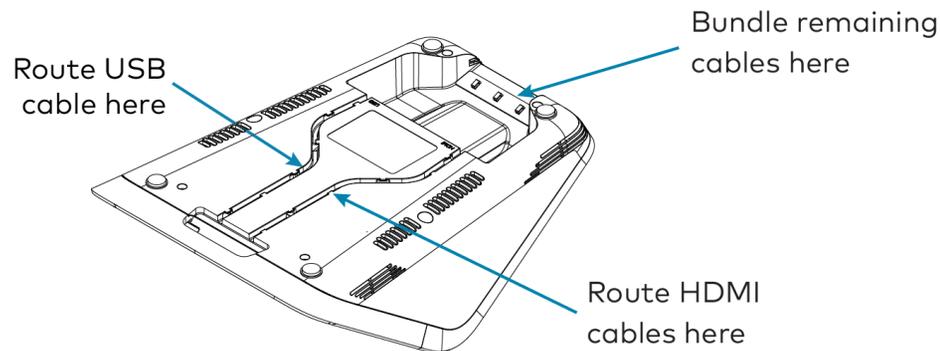

### NOTES:

- When routing USB and HDMI cables through the channels out of the front of the device, the cables do not need to be bundled. If the system design requires routing the USB and HDMI cables through the rear of the conference device, the cables should be bundled and secured to the cable retention plate.
- When using a swivel mount kit, do not route the USB and HDMI cables through the swivel tube.



## Configure

Configure the device using the web interface. To access the web interface, enter the device's IP address into a web browser. Select the gear icon in the upper right-hand corner of the screen and enter the username ("admin") and password ("admin") when prompted.

**NOTE:** To find the device's IP address, tap the information icon on the device's home screen.

For detailed configuration information, refer to the [CCS-UC-1 Product Manual](#) (Doc. 7844).



## Visit the Product Page

Scan the QR code to visit the product page.

UC-M50-U



[www.crestron.com/model/6511606](http://www.crestron.com/model/6511606)

## Crestron Flex Tabletop Medium Room Video Conference System

### Additional Information

#### Original Instructions

The U.S. English version of this document is the original instructions.  
All other languages are a translation of the original instructions.

Crestron product development software is licensed to Crestron dealers and Crestron Service Providers (CSPs) under a limited nonexclusive, nontransferable Software Development Tools License Agreement. Crestron product operating system software is licensed to Crestron dealers, CSPs, and end-users under a separate End-User License Agreement. Both of these Agreements can be found on the Crestron website at [www.crestron.com/legal/software\\_license\\_agreement](http://www.crestron.com/legal/software_license_agreement).

The product warranty can be found at [www.crestron.com/warranty](http://www.crestron.com/warranty).

The specific patents that cover Crestron products are listed at [www.crestron.com/legal/patents](http://www.crestron.com/legal/patents).

Certain Crestron products contain open source software. For specific information, visit [www.crestron.com/opensource](http://www.crestron.com/opensource).

Crestron and the Crestron logo are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and/or other countries. HDMI is either a trademark or registered trademark of HDMI Licensing LLC in the United States and/or other countries. Huddly IQ is either a trademark or registered trademark of Huddly AS in the United States and/or other countries. USB Type-C is either a trademark or registered trademark of USB Implementers Forum, Inc. in the United States and/or other countries. Other trademarks, registered trademarks, and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others. Crestron is not responsible for errors in typography or photography.

©2020 Crestron Electronics, Inc.

Doc. 8827A

09/29/20